

PENSONIC

Your Enjoyment

CATALOGUE



• Audio • Visual • Home Appliances • Air Conditioner

► SIDE BY SIDE

Super-large Storage Capacity

Adequate for Two Weeks



Side by Side Refrigerator 560 L | PSS-560IGDi



Eco
Friendly



Quiet
Operation



Low Energy
Consumption



Large
Capacity 560 L



Touch
LED Display



Dual Inverter
Technology

PSS-5601GDi

- Power : 2.1 Amp • Voltage : 220-240 V~ 50 Hz
- Capacity : 525 L (333+192) Gross : 560 L
- Black Glass Door
- Dual Inverter (Compressor & Fan Motor)
- Net Weight 78 kg
- Multiflow Cooling System



► REFRIGERATOR



PMF-661

- Power : 0.6 A
- Voltage : 220-240 V~ 50 Hz
- Capacity : 45 L
- Freezer Temp : -1°C to 1°C
- Refrigerator Temp : 0°C to 10°C
- Net Weight 16.5 kg
- Low Energy Consumption



PRT-2250

- Power : 0.6 A
- Voltage : 220-240 V~ 50 Hz
- Capacity : 225 L (Gross), 54 L (Freezer) + 147 L (Refrigerator)
- Electronic Temperature Control
- Automatic Defrost
- Non- Inverter
- Net Weight 42 kg
- Freezer Temp : -24°C to -16°C
- Refrigerator Temp : 0°C to 8°C



PRS-1100

- Power : 0.5 A
- Voltage : 220-240 V~ 50 Hz
- Capacity : 90 L (Net) , 110 L (Gross)
- Mechanical Temperature Control
- Manual Defrost
- Net Weight 19 kg
- Freezer Temp : -10°C to 0°C
- Refrigerator Temp : 0°C to 10°C



PRT-2650i

- Power : 1.27 A
- Voltage : 220-240 V~ 50/60 Hz
- Capacity : 265 L (Gross), 53 L (Freezer) + 198 L (Refrigerator)
- Electronic Control System
- Automatic Defrost
- Dual Inverter (Compressor and Fan Motor)
- Net Weight 46 kg
- Freezer Temp : -24°C to -16°C
- Refrigerator Temp : 0°C to 8°C



PRT-3650i

- Power : 1.35 A
- Voltage : 220-240 V~ 50/60 Hz
- Capacity : 365 L (Gross), 78 L (Freezer) + 270 L (Refrigerator)
- Electronic Control System
- Humidity Control
- Dual Inverter (Compressor and Fan Motor)
- Net Weight 55 kg
- Freezer Temp : -24°C to -16°C
- Refrigerator Temp : 0°C to 8°C

► SIDE BY SIDE



PSS-5600Di

- Power : 2.1 A
- Voltage : 220-240 V~ 50/60 Hz
- Capacity : 560 L (Gross), 192 L (Freezer) + 333 L (Refrigerator)
- Freezer Temp : -24°C to -16°C
- Refrigerator Temp : 0°C to 8°C
- Dual Inverter (Compressor & Fan Motor)
- Net Weight 78 kg
- Multiflow Cooling System



PRT-4350i

- Power : 0.96 A
- Voltage : 220-240 V~ 50/60 Hz
- Capacity : 435 L (Gross), 100 L (Freezer) + 310 L (Refrigerator)
- Electronic Control System
- Humidity Control
- Dual Inverter (Compressor and Fan Motor)
- Net Weight 68 kg
- Freezer Temp : -24°C to -16°C
- Refrigerator Temp : 0°C to 8°C



PSS-5601GDi

- Power : 2.1 A
- Voltage : 220-240 V~ 50 Hz
- Capacity : 560 L (Gross), 192 L (Freezer) + 333 L (Refrigerator)
- Freezer Temp : -24°C to -16°C
- Refrigerator Temp : 0°C to 8°C
- Black Glass Door
- Dual Inverter (Compressor & Fan Motor)
- Net Weight 78 kg
- Multiflow Cooling System

► REFRIGERATOR SPECIFICATION



Model		PSS-5600Di	PSS-5601GD	PRT-4350i	PRT-3650i	PRT-2650i	PRT-2250	PRS-1100
Total Capacity (Litres)	Gross	560 L	560 L	435 L	365 L	265 L	225 L	110 L
	Net	525 L	525 L	410 L	348 L	251 L	201 L	90 L
Storage Capacity (Litres)	Freezer Net	192 L	192 L	100 L	78 L	53 L	54 L	9 L
	Refrigerator Net	333 L	333 L	310 L	270 L	198 L	148 L	83 L
Net Dimension (mm)	Width	912 mm	912 mm	700 mm	595 mm	545 mm	545 mm	474 mm
	Depth (Wth Handle)	642 mm	642 mm	700 mm	671 mm	590 mm	590 mm	447 mm
	Height	1762 mm	1762 mm	1680 mm	1705 mm	1700 mm	1465 mm	831 mm
Weight	Net (kg)	78 Kg	87 Kg	68 Kg	54 Kg	46 Kg	42 Kg	19 Kg
Power Supply	Voltage (V) Frequency (Hz)	220-240-50/60	220-240-50	220-240-50/60	220-240-50/60	220-240-50/60	220-240-50	220-240-50
Cooling System	Frost Free	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Manual
Energy Rating		-	-	3	4	5	5	3
Inverter		✓	✓	✓	✓	✓	-	-
General Features	Panel	Black Steel	Black Glass	Black Steel	Black Steel	Black Steel	Dark Grey	Dark Grey
	Refrigerant	R600a	R600a	R600a	R600a	R600a	R600a	R600a
	Electronic Control	✓	✓	✓	✓	✓	✓	-
	LED	✓	✓	✓	✓	✓	✓	✓
	Child Lock	✓	✓	✓	✓	✓	✓	-
	ECO Mode	✓	✓					
	Vacation Mode	✓						
	Fast Freezing	✓	✓					
	Fast Cooling		✓					
	Door Alarm	✓	✓	✓	✓	✓	✓	-
	Reversible Door	-	-	✓	✓	✓	✓	✓
	Adjustable Front Legs	✓	✓	✓	✓	✓	✓	✓
	Warranty General	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years	1 Year
	Warranty Compressor (≤ 599 L, ≥ 600 L)	10 Years	10 Years	10 Years	10 Years	10 Years	10 Years	5 Years

*Specifications and designs are subject to change without prior notice.

► CHILLFLEX UPRIGHT FREEZER

ChillFlex Upright Freezer PUF-1350D

- Power : 0.91 A
- Voltage : 220-240 V~ 50/60 Hz
- Capacity : 134 L (Gross), 122 L (Net)
- Electronic Control System
- Inverter Compressor
- 6 Conversion Modes
- Frameless Door Design
- Solid Top Cover For Microwave Ovens

- Modes : 6 (Freeze/Beverage/Fridge/Chill/Soft Freeze/Wine)

FREEZE	-16°C to -24°C
BEVERAGE	4/6/8/10/12°C
FRIDGE	2°C to 8°C
CHILL	-3°C to 3°C
SOFT-FREEZE	-3°C to -8°C
WINE	5/8/10/11/12/14/15°C

2
YEARS

GENERAL
WARRANTY

10
YEARS

COMPRESSOR
WARRANTY



The Cool Way to

Chill and Freeze!



Design & Space Efficiency

Heat-Resistant Top (100°C):

Stack microwaves or other appliances to save space.

Sleek & Solid:

Frameless door and solid top for a smooth, modern look

Slim & Compact:

Only 475mm wide, taking up just 0.27m², smaller than typical chest freezers

Side-open door

maximises top space



No more ice buildup

automatic defrosting keeps items frost-free



Multiflow Cooling

Even airflow prevents food from drying out or sticking together



Air Cooling, No Frost

All-directional cooling ensures fresh, evenly frozen food.



► CHILLFLEX UPRIGHT FREEZER



One-Touch Display
Check status without opening the door.



Door Open Alarm
Alerts you if left open for 3+ minutes, ensuring your food stays fresh.



Detachable Gasket
Easy to clean and maintain.

Smart Features for Effortless Use



Reversible Door
Customise door direction to fit your available space

► CHILLFLEX UPRIGHT FREEZER



ChillFlex Upright Freezer PUF-1350D Technical Specifications

Voltage	220 - 240V~ 50/60Hz	
Rated current	0.91A	
Defrosting Power	140 W	
Frost	No frost design	
Gross capacity	134 L	
Net capacity	122 L	
Modes	6 (Freeze/Beverage/Fridge/Chill/Soft Freeze/Wine)	
	FREEZE	-16°C to -24°C
	BEVERAGE	4/6/8/10/12°C
	FRIDGE	2°C to 8°C
	CHILL	-3°C to 3°C
	SOFT-FREEZE	-3°C to -8°C
	WINE	5/8/10/11/12/14/15°C
Climate class	T	
Cooling system	Multi directional air flow	
Temperature control	Electronic	
Refrigerant	R600A/37 g	
Foam blowing agent	Cyclopentane	
Plug	Optional	
Colour	Dark grey	
Door quantity	One	
Adjustable feet	Yes	
Handle type	Recessed	
Key/lock	No	
Interior lamp	Yes (top)	
Shelf	1 transparent	
Tray	4 transparent	
Drawer	1 transparent	
Width (net/packing)	474/515 mm	
Depth (net/packing)	565/615 mm	
Height (net/packing)	1155/1188 mm	
Warranty	2 years (General), 10 years (Compressor)	
Gross weight	36 kg	
Net weight	31 kg	

► FREEZER

ULTIMATE FROST ZONE



Chest Freezer 299 L | PFZ-303



Storage basket,
ice maker and
scoop provided



Adjustable
thermostat
and dual cooling
options



Balanced
hinge design



Compact and
space-efficient



PFZ-113



PFZ-153



PFZ-203



PFZ-153/ PFZ-203



PFZ-205G

► FREEZER SPECIFICATION



PFZ-408G



PFZ-402/ PFZ-502

MODEL	PFZ-113	PFZ-153	PFZ-203	PFZ-205G	PFZ-303	PFZ-402	PFZ-502	PFZ-408G
Power	0.6 A	1.1 A	1.1 A	1.1 A	1.3 A	2.38 A	2.7 A	2.5 A
Voltage (V) Frequency (Hz)	220-240 50	220-240 50	220-240 50	220-240 50	220-240 50	220-240 50	220-240 50	220-240 50/60
Capacity	99 L	142 L	199 L	199 L	299 L	400 L	500 L	314 L
Gross Weight	22 kg	26 kg	28 kg	31 kg	41 kg	53 kg	70 kg	61 kg
Max & Min Cooling Temperature	-12°C to -26°C	-12°C to -26°C	-12°C to -26°C	-12°C to -26°C	-12°C to -26°C	-12°C to -26°C	-12°C to -26°C	-12°C to -26°C
Corrosion Resistant Cabinet	✓	✓	✓	✓	✓	✓	✓	✓
Concealed High Efficiency Compressor	✓	✓	✓	✓	✓	✓	✓	✓
Low Energy Consumption	✓	✓	✓	✓	✓	✓	✓	✓
Space Saving	✓	✓	✓	✓	✓	✓	✓	✓
Ext. Dims (mm)	545 L x 476 W x 835 H	635 L x 556 W x 835 H	823 L x 556 W x 835 H	823 L x 556 W x 835 H	1115 L x 610 W x 845 H	1365 L x 730 W x 835 H	1650 L x 730 W x 835 H	1361 L x 675 W x 782 H
Warranty General	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year
Warranty Compressor (≤ 599L , ≥ 600L)	5 Years	5 Years	5 Years	5 Years	5 Years	5 Years	5 Years	5 Years



Adjustable
Thermostat



Low Energy
Consumption



Corrosion
Resistant Cabinet



Modern
& Stylish Design



Concealed
High Efficiency
Compressor

► KITCHEN APPLIANCES



PB-426

- 350 W
- 220-240 V~ 50/60 Hz
- 1.25 L
- 2 Speeds and Pulse Function
- Jug Cover with Stirrer
- Safety Lock
- Accessories : Mill



PB-3203

- 250 W
- 220-240 V~ 50 Hz
- 1 L
- Powerful Motor
- Jug Cover with Stirrer
- Safety Lock
- Accessories : Mill



PB-3203L

- 250 W
- 220-240 V~ 50 Hz
- 1 L
- Safety Switch
- Powerful Motor
- Jug Cover with Stirrer



PB-3205DJ

- 250 W
- 220-240 V~ 50 Hz
- 1 L
- Safety Switch
- Jug Cover with Stirrer
- Safety Lock
- Accessories : Mill Jug 1.0 L (x2)


Blend, Whirl, and *Sip!*

PB-3302M

- 350 W
- 220-240 V~ 50/60 Hz
- 1 L
- 2 Speeds and Pulse Function
- Jug Cover with Stirrer
- Safety Lock
- Accessories : Mill



**2 Speeds
And Pulse
For The
Ideal Blend**



**Ultra-sharp
Stainless Steel
Blades For Quick,
Precise Prep**



PB-3207M

- 350 W
- 220-240 V~ 50/60 Hz
- 1.5 L
- 2 Speeds and Pulse Function
- Safety Switch
- Jug Cover with Stirrer
- Safety Lock
- Accessories : Mill



PB-3302

- 350 W
- 220-240 V~ 50/60 Hz
- 1 L
- Jug Cover with Feeder Hole
- 2 Speeds and Pulse Function
- Powerful Motor
- Safety Lock
- Accessories : Mill



PB-3303

- 350 W
- 220-240 V~ 50/60 Hz
- 1 L
- Jug Cover with Feeder Hole
- 2 Speeds and Pulse Function
- Powerful Motor
- Safety Lock
- Accessories : Mill



PB-3303M

- 350 W
- 220-240 V~ 50/60 Hz
- 1 L
- 2 Speeds and Pulse Function
- Jug Cover with Stirrer
- Safety Lock
- Accessories : Mill

PERSONAL BLENDER PB-4004V

fitmi
by Pensonic

- 250 W • 220-240 V~ 50/60 Hz
- 2 X 600 ml BPA Free Tritan Sports Bottle
- Stainless Steel Cutter Blades
- Safety Lock Protection
- Non Slip Grip Feet
- Leak Proof Travel Lid and Snap Hook
- Blends Fruits, Vegetables and Crushes Ice
- Ideal Choice for Travellers

Scan & Watch



JUICE EXTRACTOR PJ-7002

- 2000 W
- 220-240 V~ 50/60 Hz
- Digital Panel
- Big Mouth 88 mm Chute
- DC Motor
- Speed 65 RPM
- Frozen Treats Maker
- 15 Minutes Continuous Use



PB-5001

- 500 W • 1.8 L Jug • 1.2 L Food Processor Bowl
- 220-240 V~ 50 Hz • 2 Speeds with Pulse
- Motor with Overheating Protection
- Double Safety Switch
- Multi-function : Blending / Chopping / Slicing
Grating / Emulsifying / Juicing
- Accessories : Slicing Blade, 2 Shredding Blades, Chopper, Kneading Blade, Emulsifying Disc, Citrus Juicer, Blender



Blender

Chopper

Citrus Juicer

Emulsifying Disc



Shredding Blade

Shredding Blade

Slicing Blade

Kneading Blade



Food Chopper PB-6005GX

- 500 W
- 220-240 V~ 50/60 Hz
- 1 L
- Anti-slip Base
- One Touch Chopping Function
- Easy Clean Transparent Glass Bowl
- Plastic Body with Stainless Steel Decoration Sheet

► KITCHEN APPLIANCES

THERMO FLASK PTF-4800

- 750 W • 220-240 V~ 50/60 Hz
- 4.8 L • Auto Reboil / Keep Warm
- 360° Swivel Base • Water Level Gauge
- Stainless Steel Inner Pot
- 2-way Dispenser (Button / Cup)



PTF-5001

- 750 W • 5 L
- 220-240 V~ 50/60 Hz
- Auto Reboil / Keep Warm
- 360° Swivel Base
- Water Level Gauge
- Stainless Steel Inner Pot
- 2-way Dispenser (Button / Cup)



PTF-6000

- 730 W • 6 L
- 220-240 V~ 50/60 Hz
- Auto Reboil / Keep Warm
- 360° Swivel Base
- Water Level Gauge
- Stainless Steel Inner Pot
- 2-way Dispenser (Button / Cup)



PTF-3001

- 750 W • 3 L
- 220-240 V~ 50/60 Hz
- Auto Reboil / Keep Warm
- 360° Swivel Base
- Water Level Gauge
- Stainless Steel Inner Pot
- 2-way Dispenser (Button / Cup)



PTF-5003

- 750 W • 5 L
- 220-240 V~ 50/60 Hz
- Auto Reboil / Keep Warm
- 360° Swivel Base
- Water Level Gauge
- Stainless Steel Inner Pot
- 2-way Dispenser (Button / Cup)

► WATER DISPENSER



PWD-700

- 680 W
- 220-240 V~ 50/60 Hz
- Hot Water Capacity : 5.4 L
- Warm Water Capacity : 1.6 L
- Stopcock Button
- Water Level Indicator
- Auto Boil & Reboil Function
- Keep Warm Function
- Easy To Use Operation Button

Electric Jug Kettle 1.8L PAB-1800CS

Fast, Flavourful Brews



PAB-1800CS
• Inner Pot
304S/S +
S/S Outer Layer



PAB-1801CS
• Inner Pot
304S/S +
Plastic
Outer Layer



PAB-1802CS
• Inner Pot
304S/S +
Plastic
Outer Layer

JUG KETTLE

- 1800 W
- 220-240 V~ 50/60 Hz
- 1.8 L
- Seamless
- Indicator Light
- Double Wall Insulation with Cool Touch Exterior
- One-touch Spring Lid : Easy Opening & Closing



**Rapid Boiling With
304 Stainless
Steel Pot And
One-touch Lid**



**Auto
Switch-off**



**Concealed Heating
Element and
Seamless Inner Lining**

PAB-1715CS

- 1800 W
- 220-240 V~ 50/60 Hz
- 1.7 L
- Cordless
- Double Wall Insulation with Cool Touch Exterior
- Seamless Inner Lining Tank For Easy Cleaning
- Concealed Heating Element
- SUS304 Food Grade Material Inner Tank



PAB-1718

- 1850-2200 W
- 220-240 V~ 50/60 Hz
- 1.7 L
- Cordless
- Auto Switch Off and Boil-Dry Protection
- Manual Lid Opening
- Water Level Indicator

ELECTRIC KETTLE PAK-5002

- 2000 W
- 4.2 L
- 220-240 V~ 50/60 Hz
- Concealed Heating Element
- Automatic Switch Off
- Boil-Dry Protection



COFFEE MAKER PCM-1902

- 750 W
- 220-240 V~ 50/60 Hz
- Capacity 1.25 L (10 Cups)
- Anti-Drip Device
- Translucent Water Tank with Level Indicator
- Removable Filter Holder
- ON/OFF Switch with Indicator Light
- Warming Plate
- Measuring Spoon

► KITCHEN APPLIANCES



► HAND MIXER



PM-116(B) / PM-116(G)

- 300 W • 220-240 V~ 50/60 Hz
- 5 Speeds for Different Mixing Needs
- Light Weight Ergonomic Design For Easy Handling
- Turbo Powered
- Push Button Beater Ejection
- Accessories : Beaters And Dough Hooks



PM-117(B) / PM-117(P)

- 300 W • 220-240 V~ 50/60 Hz
- 5 Speeds for Different Mixing Needs
- Eject Button to Remove Beater and Dough Hook
- Heat Emission Outlet
- Accessories : Beaters And Dough Hooks

► STAND MIXER



PM-214

- 200 W
- 220-240 V~ 50/60 Hz
- Bowl Capacity : 3 L
- 5 Speeds & Pulse
- Positive Beater Lock
- Swivel Bowl For Even Mxing And Turbo Function

Busy Day Solutions



MICROWAVE OVEN PMW-2005

- 650-700 W • 230-240 V~ 50 Hz
- Capacity : 20 L • Indicator Light
- Defrost By Weight Or Time • Cavity : Grey Painted
- Mechanical Control, Big Screen Glass
- 5 Microwave Power Levels • 35 Min Kitchen Timer
- Push Button Open Door • Cooking End Signal


20 L



User-friendly controls, glass display, push-button door.



Defrost by weight or time, with alerts.



Grey painted cavity, spacious interior and turntable.

Unleash *endless* Possibilities



Stay On
Stops Auto
Shut Off
After Timer Ends



Black
Diamond
Inner
Lining



Low Temperature
Function Suitable
for Slow Cooking,
Warming Food



Bake, Roast,
and Broil
at Up to
230°C

► OVEN



25L



PEO-2511

- 1500 W
- 220-240 V~ 50/60 Hz
- Temperature Up To 230°C
- 60 Minutes Timer With Chime
- Stainless Steel Door Handle
- Single Glass Door
- 4 Stainless Steel Heating Elements
- Stay On And Low Temperature Settings



70L



PEO-7011

- 2200 W
- 220-240 V~ 50/60 Hz
- Temperature Up To 230° C
- 120 Minutes Timer With Stay On And Chime
- Stainless Steel Door Handle
- Single Glass Door
- 6 Stainless Steel Heating Elements
- Stay On And Low Temperature Settings



100L



PEO-1111

- 2700 W
- 220-240 V~ 50/60 Hz
- Inner Light
- Temperature Up to 230°C
- 120 Minutes Timer With Chime
- Black Panel & Casing
- 6 Stainless Steel Heating Elements
- Rotisserie And Convection
- Stainless Steel Control Panel
- Stay On And Low Temperature Settings



35L

PEO-3511

- 1500 W
- 60 Minutes Timer With Chime

46L

PEO-4611

- 1800 W
- 120 Minutes Timer With Chime

PEO-3511 / 4611

- 220-240 V~ 50/60 Hz
- Temperature Up To 230°C
- Automatic Shut Off
- Stainless Steel Door Handle
- 4 Pieces Stainless Steel Heating Elements
- Rotisserie And Convection With Inner Lamp
- Stay On And Low Temperature Settings



48L

PEO-4804

- 1800 W

68L

PEO-6804

- 2200 W

PEO-4804 / 6804

- 220-240 V~ 50/60 Hz
- 60 Minutes Timer With Chime
- Adjustable Temperature Control
- Automatic Shut Off
- Heater And Function Selector For
 - Upper & Lower With Convection
 - Lower With Convection
 - Upper & Lower
 - Upper With Rotisserie
 - Upper & Lower With Convection + Rotisserie
- Tray, Tray Handle, Rotisserie Fork & Crumb Tray Provided
- Toast, Grill and Bake
- With Inner Light

TAPSTY

TAP FOR TASTY LAND

STEAM AIR FRYER PSO-3200DG OVEN

- Steam Power : 1400 W ; Air Fryer Power : 1800 W
- 220-240 V~ 50/60 Hz
- Capacity : 32 L ; Water Tank Capacity : 1 L
- Real Steam Feature For Thorough Cooking
- Air Frying With Steam For A Crispy Yet Tender Result
- Air Fry Reminder Prompts To Turn Food For Even Cooking
- Water Shortage Alarm Alerts When Water Level Is Low
- Touch Screen And Manual Knob For Easy Control
- Sterilisation Function For Hygiene And Food Preservation
- Door Open Sensor Automatically Stops Operation



**BIG
CAPACITY
32 L**



AIR FRYING
Crispy, Low-Cal,
Oil-Free.
No Deep Frying!



STEAMING
Rich Flavour
Effortless Steaming,
Perfect Results.



BAKING
Fluffy Texture,
Truly
Delicious

Steam Air Fryer Oven PSO-3200DG



Cook Smarter, Not Harder!


With 109 menus, cooking is easy and fun. Simply choose your mode and enjoy delicious meals, while the durable food-grade 304 stainless steel interior ensures reliable performance.

Door Open Sensor
Automatically
Stops Operation

Bottom guide
groove prevents
water accumulation,
for easy cleaning

Smart Cooking, Savoury Results

Elevate cooking with 'Superheat Steam Technology' for fast, flavourful meals! The Air Fryer mode delivers crispy perfection, while other functions include Defrost, Ferment, Warm, Clean, Dry, and Sterilise.

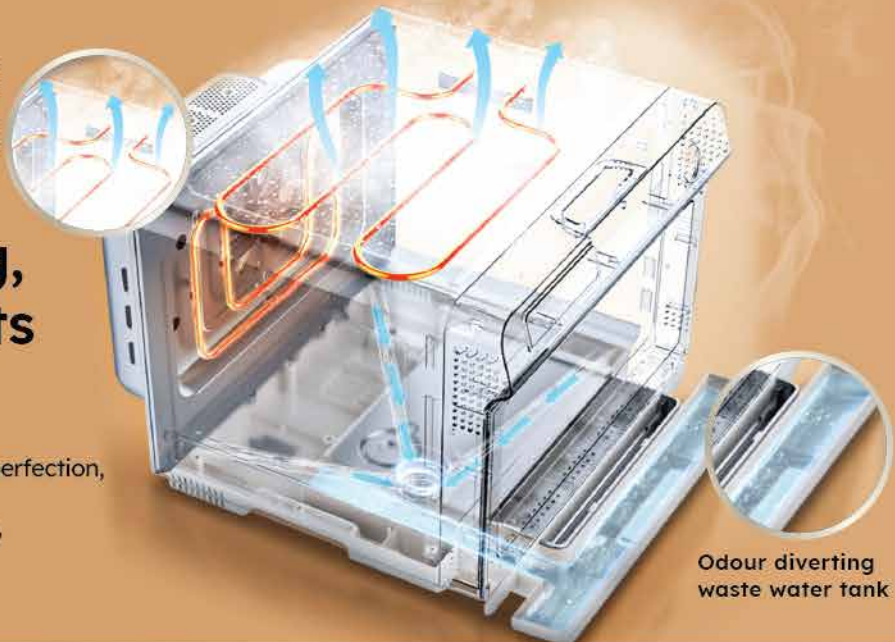

Odour diverting
waste water tank

Touch Screen And Manual Knob For Easy Control

Cook with ease and speed! The user-friendly controls, sleek display, touch buttons, and fast heating (25°C to 100°C in 3 seconds) make meal prep a breeze.



Retro Oven Design

this sleek, vintage-inspired oven combines timeless aesthetics with modern functionality for a classic yet efficient kitchen experience.



Classic Retro Knobs



Woodgrain Design Handle And Feet



20L



28L



36L

PEO-2012

- 1380 W
- 220-240 V~ 50/60 Hz
- 60 Minutes Timer With Chime
- 4 Stainless Steel Heating Elements
- 6 Preset Menus And Convection
- Adjustable Rack Positions
- Simple Operation Knobs

PEO-2812

- 1500 W
- 220-240 V~ 50/60 Hz
- 60 Minutes Timer With Chime
- 4 Stainless Steel Heating Elements
- 6 Preset Menus And Convection
- Adjustable Rack Positions
- Simple Operation Knobs
- With Inner Lamp

PEO-3612

- 1500 W
- 220-240 V~ 50/60 Hz
- 60 Minutes Timer With Chime
- 4 Stainless Steel Heating Elements
- 6 Preset Menus And Convection
- Adjustable Rack Positions
- Simple Operation Knobs
- Rotisserie And Convection With Inner Lamp

► TOASTER



PT-928

- 680-820 W • 2 Slices
- 200-240 V~ 50/60 Hz
- Adjustable Browning Knob
- Crumb Tray for Easy Cleaning
- Cancel Function
- Extra-lift, Auto Safety Shut Off and Auto-centering Tray



PT-929

- 750 W • 2 Slices
- 220-240 V~ 50/60 Hz
- Browning Control Knob
- Cancel Button
- Extra-lift, Auto Safety Shut Off and Auto-centering Tray

► SANDWICH TOASTER



PST-9603(W)

- 750 W
- 220-240 V~ 50/60 Hz
- Double Slices with Fixed Plate
- Automatic Temperature Control
- Non-stick Coating for Easy Cleaning



PST-9603(G)

- 750 W
- 220-240 V~ 50/60 Hz
- Double Slices with Fixed Plate
- Automatic Temperature Control
- Non-stick Coating for Easy Cleaning

► SLOW COOKER



PSC-101

- 100-120 W • 1 L
- 220-240 V~ 50/60 Hz
- Flower Design Casing
- With Indicator Light
- 3 Temperature Settings (Low, High, Auto)



PSC-301

- 215-225 W • 3 L
- 220-240 V~ 50/60 Hz
- Flower Design Casing
- With Indicator Light
- 3 Temperature Settings (Low, High, Auto)

PSC-501

- 290-345 W • 5 L
- 220-240 V~ 50/60 Hz
- Flower Design Casing
- With Indicator Light
- 3 Temperature Settings (Low, High, Auto)



► KITCHEN APPLIANCES

► FOOD STEAMER



PSM-1603

- 800 W • 220-240 V~ 50/60 Hz
- Capacity 9.0 L (3 Layers)
- Rice Bowl
- Indicator Light
- 3 Steaming Containers
- 60 Minutes Timer with Auto Shut Off and Chime
- Transparent Water Level Indicator and Water Refill Window

► CERAMIC STEAMER



PSM-1604

- 650-775 W
- Comes with 7 preset computerised control modes including Rice, Meat, Corn, Chicken, Ribs, Vegetables and Dessert.
- Two 3.0 L ceramic trays are provided to allow preparation of two tasty dishes simultaneously to save time and energy.
- Timer can be set to complete cooking by a desired time up to a maximum of 9.5 hours.
- Transparent water level indicator and double water inlets help in easy filling of water.
- Boil dry protection safety feature will shut off appliance when there is no liquid in the pot.

► STEAMBOAT



PSB-131G

- 1900 W • 2.5 L
- 220-240 V~ 50/60 Hz
- Dimension 370mm
- Detachable Thermo-controller
- Rapid & Even Heating
- Heat Insulation & Convenient Handle
- Non-stick Coating Die-cast Plate
- BBQ Grill & Hot Pot

PSM-1605

- 1600 W • 220-240 V~ 50/60 Hz
- Capacity : 28 L
- 2 Tiers to Prepare More Dishes
- 60 Minutes Timer • Double Heaters
- Rice Steaming and Water Refill Containers
- Convenient Water Refill Funnel with Visible Water Level Indicator
- Multi-Function : Steaming and Cooking



PSB-136G

- 1600 W • 2.6 L
- 220-240 V~ 50 Hz
- Tempered glass lid for Hot Pot
- Multipurpose : Grill, Boil, Fry, Roast, Cook, Stew
- Two adjustable power control knobs with power-on
- Non-stick Grill Pan with 2 layers - Free of Perfluorooctanoic Acid

► MULTI COOKER



PMC-1302

- 1300 W • 3.5 L
- 220-240 V ~ 50/60 Hz
- Adjustable Temperature Control
- Stewing, Steaming, Stir Frying, Deep Frying

PMC-1502

- 1500 W • 5 L
- 220-240 V ~ 50/60 Hz
- Adjustable Temperature Control
- Stewing, Steaming, Stir Frying, Deep Frying



PMC-1702

- 1800 W • 7 L
- 220-240 V ~ 50/60 Hz
- Easy Control Rotary Switch
- Tempered Glass Lid
- Detachable, Non-stick, Aluminium Inner Pot



PMC-1302S

- 1300 W • 3.5 L
- 220-240 V ~ 50/60 Hz
- Boil-Dry Protection
- Easy to Control Rotary Switch
- Removable Non-stick Inner Pot
- Tempered Glass Lid for Easy Viewing of Cooking Progress
- Overheating Protection
- Stewing, Steaming, Stir Frying, Deep Frying

► INDUCTION COOKER



PIC-2008

- 2000 W • Weight 2.15 kg
- 220-240 V ~ 50/60 Hz
- Timer 0 -180 Mins
- Easy Touch Operating Controls
- LED Display Control Panel
- Cool Touch Cooking Surface with Child Lock
- Adjustable Heating, Overheating Protection
- Environment Friendly, Flameless & Smokeless
- Accessories: Stainless Steel Cooking Pot

Digital Precision, Delicious Results



REMOVES UP TO
23%
STARCH



DIGITAL LOW SUGAR RICE COOKER PSR-1501DLS

- 730 W • 220-240 V~ 50/60 Hz
- Capacity 1.5 L • 5-8 Persons
- One Touch Buttons with LED Display
- Maximum Preset Time : 24 Hours
- Boil Dry and Overheat Protection
- 9 Programmes : Low Carb Rice, White Rice, Brown Rice, Grain Rice, Steam, Congee, Soup, Keep Warm, Reheat
- Accessories : Steamer, Rice Paddle, Spoon, Measuring Cup

Cooks Fluffy Rice
Quickly And Evenly



5-Layer,
1.5 mm Thick Aluminium
Inner Pot



Digital Rice Cooker

Your Ultimate Cooking Partner

DIGITAL RICE COOKER PSR-1500D

- 730 W
- 220-240 V~ 50/60 Hz
- Capacity 1.5 L • 5-8 Persons
- Maximum Preset Time : 24 hours
- Boil Dry and Overheat Protection
- One Touch Buttons with LED Display
- Non-stick Inner Pot
- 9 Programmes : Fast Cook, Slow Cook, Brown Rice, Steam, Stew, Congee, Soup, Keep Warm, Reheat
- Accessories : Steamer, Rice Paddle, Spoon, Measuring Cup

CAPACITY
1.5 L



► KITCHEN APPLIANCES

Steamy Goodness with Every Meal



PSR-1802

- 700 W • 220-240 V~ 50 Hz • Capacity : 1.8 L
- 5-8 Persons • Non-stick Inner Pot For Easy Cleaning
- Keep Warm Function • With Dew Collector
- Cook And Keep Warm Indicator Light



PSR-2802

- 1000 W • 220-240 V~ 50/60 Hz • Capacity : 2.8 L
- 9-12 Persons • Non-stick Inner Pot For Easy Cleaning
- Keep Warm Function • With Dew Collector
- Cook And Keep Warm Indicator Light



Cook And
Keep Warm
Indicator Light



Non-stick
Inner Pot



PSR-1807

- 700 W • 220-240 V~ 50 Hz
- Capacity : 1.8 L
- Non-Stick Inner Pot for Easy Cleaning
- Functions : Cook, Keep Warm
- With Dew Collector
- Spray Paint Housing

► RICE COOKER



PRC-3602

- 1300 W • 220-240 V~ 50 Hz
- Capacity : 3.6 L
- Aluminium Inner Pot
- Spray Paint Housing
- Stainless Steel Lid
- Cook And Keep Warm Function



PRC-6E



PRC-11E



PRC-15E



PRC-18E



PRC-28E

- Cook And Keep Warm Function • See-through Glass Lid • Built-in Thermal Fuse
- Push Button Operation

Model	Power	Voltage	Capacity	Persons	Energy Rating Stars (CSPF)	Non-stick Inner Pot	Aluminium Inner Pot
PRC-6E	300 W	220-240 V~ 50/60 Hz	0.6 L	1-2	4	•	
PRC-11E	400 W	220-240 V~ 50 Hz	1.0 L	3-4	2	•	
PRC-15E	500 W	220-240 V~ 50/60 Hz	1.5 L	5-6	3	•	
PRC-18E	700 W	220-240 V~ 50 Hz	1.8 L	7-8	3	•	
PRC-28E	1000 W	220-240 V~ 50 Hz	2.8 L	9-12	3		•

Cook, Keep, Conquer!

Stainless Steel Lid, and Stylish Housing



Aluminium Inner Pot



'Cook' and 'Keep Warm' for Fluffy Rice



- Cook And Keep Warm Function
- Stainless Steel Lid
- With Thermostat Controller
- Easy Push Button Operation

Model	Power	Voltage	Capacity	Persons	Energy Rating Stars (CSPF)	Aluminium Inner Pot
PRC-603	300 W	220-240 V~ 50/60 Hz	0.6 L	1-2		•
PRC-1003	400 W	220-240 V~ 50/60 Hz	1.0 L	3-4	2	•
PRC-1803	700 W	220-240 V~ 50/60 Hz	1.8 L	7-8	3	•
PRC-2803	1000 W	220-240 V~ 50/60 Hz	2.8 L	9-12	4	•

Fluffy Rice *Feast*

Features luxury handle, stylish white heating plate and durable aluminium inner pot topped with stainless steel lid.



**Stainless
steel lid**



**Durable
aluminium pot**



**Push-button
with auto cook
and 'Keep Warm'**

► COMMERCIAL RICE COOKER



PRC-1000A / 1200A / 5600A / 8000A

- Auto Cook With Keep Warm Function
- Cook / Warm Light Indicator
- With Thermostat Controller
- Easy Push-button Operation

Model	Power	Voltage	Capacity	Persons	Aluminium Inner Pot
PRC-5600A	2000 W	220-240 V~ 50/60 Hz	5.6 L	30	•
PRC-8000A	2500 W	220-240 V~ 50/60 Hz	8.0 L	40	•
PRC-1000A	2800 W	220-240 V~ 50/60 Hz	10 L	55	•
PRC-1200A	2950 W	220-240 V~ 50/60 Hz	12 L	60	•



PGR-8100 / 8200

- L.P.G
- Dew Collector
- Spray Paint Housing

Model	Power	Capacity	Persons	Gas Pressure	Aluminium Inner Pot Weight
PGR-8100	8.17 kW	10 L	55	2.8 kPa	3.9 kg (3.5 mm thickness)
PGR-8200	11 kW	20 L	100	2.8 kPa	5.1 kg (4.5 mm thickness)



FOOD STEAMER PSM-162S

- 800 W
- 220-240 V~ 50/60 Hz
- 2 Containers Capacity 12 L
- With 1L Rice Bowl
- Indicator Light
- Stainless Steel Housing
- 60 Minutes Timer with Auto Shut Off & Chime
- Water Window with Side Water Refill

CLASSIC — SERIES — PENSONIC

JUICER PJ-6902S

- 600 W
- 220-240 V~ 50/60 Hz
- Capacity : 1.5 L Pulp Container + 750 ml Juice Cup
- 75 mm Diameter Feeding Tube
- Stainless Steel Housing and Blade Assembly
- Stainless Steel Filter Basket for Easy Cleaning
- Two Speeds
- Overheat Protector Powerful Motor
- Safety Lock Device
- Detachable Parts for Easy Cleaning
- Accessories: Cleaning Brush



SANDWICH MAKER PST-9602S


- 750 W
- 220-240 V~ 50/60 Hz
- Cool Touch Housing
- Non-Stick Coating
- Durable Casing
- Skid-Resistant Feet
- Cord Storage

WHIRLWIND ACTION BURNER

GAS COOKER PGC-2201G

- Burner Size : 90*90 (mm)
- Slim Glass-top
- Automatic Ignition
- 6 mm Tempered Glass
- Gas Consumption :
Left : 3.0 kW, Right : 3.5 kW
- For L.P.G Use

Scan & Watch



ENVIRONMENTALLY FRIENDLY COOKING

Has higher heat efficiency to save energy and 60% lower carbon emissions than international standards requirement.



NO MORE CLOGGED BURNERS!

Uniquely designed, hidden oblique burner holes ensure burner holes stay clear longer compared to ordinary stoves.



FOCUSED, POWERFUL FLAMES

Strong, 25 degree tangential whirlwind like flames deliver even and precise heat for best cooking results.



PGC-3201G



- Burner Size: 90*40*90 (mm)
- 6 mm Tempered Glass
- Automatic Ignition
- Rated Heat Input :
Left : 3.0 kW; Center : 0.7 kW;
Right : 3.5 kW
- For L.P.G Use



PGC-5602S



- Burner Size : 105*105 (mm)
- Stainless Steel Housing
- Automatic Ignition
- Rated Heat Input :
Left : 4.4 kW Right : 4.4 kW
- For L.P.G Use

► DOUBLE BURNER GAS COOKER



PGC-26N



- Burner Size : 100*100 (mm)
- Epoxy Coated Body
- Automatic Ignition
- Durable Trivet
- Rated Heat Input :
Left : 3.2 kW; Right : 3.2 kW
- For L.P.G Use



PGC-28S



- Burner Size : 100*100 (mm)
- Stainless Steel Body
- Automatic Ignition
- Durable Trivet
- Rated Heat Input :
Left : 3.2kW; Right : 3.2kW
- For L.P.G Use

► KITCHEN APPLIANCES

► DOUBLE BURNER GAS COOKER



PGC-55S

- Burner Size : 120*120 (mm)
- Stainless Steel Body
- Durable Trivet
- Rated Heat Input :
Left : 3.4 kW; Right : 3.4 kW
- Brass Cap
- Automatic Ignition

► SINGLE BURNER GAS COOKER



PGC-1001S

- Burner Size : 100 (mm)
- Stainless Steel Body
- Rated Heat Input : 3.2 kW
- Durable Trivet

► COMMERCIAL STOVE



PGS-33C

- Burner Diameter Size : 153 (mm)
- 6.0 kW • Dual Ring
- Automatic Ignition
- L.P.G.
- G.W.: 4.05 kgs
- N.W.: 3.65 kgs
- Size : 525(L) x 285(W) x 130(H) (mm)



PGS-43C

- Burner Diameter Size : 195 (mm)
- 10 kW • Dual Ring
- Automatic Ignition
- L.P.G.
- G.W.: 4.70 kgs
- N.W.: 4.30 kgs
- Size : 565(L) x 320(W) x 120(H) (mm)

► PORTABLE GAS STOVE



PPG-2003N

- Output : 2.6 kW/hr (2200 kcal/hr)
- Gas Consumption : 185 g/hr
- Cartridge (3~5 kg/cm²)
- Butane Gas
- Low Concentration : <800 PPM
- Variable Flame Control
- Refillable Gas Cartridge
with Liquid Guard



PPG-2004N

- Output : 2.3 kW/hr
(2980 kcal/hr)
- Gas Consumption : 166 g/h
- Cartridge (3~5 kg/cm²)
- Butane Gas
- Single Function Portable Gas Stove
- Cold-roll Steel With Paint Surface
- Die-cast Aluminium Alloy Burner

Sizzle, Simmer, Serve


Double Burner
Stainless Steel Hob
PGH-622S



BUILT-IN GAS HOB




Convenient
double piping,
alloy knob,
battery ignition



Easy clean
stainless steel
top and enamel
support




Triple Ring
Burners

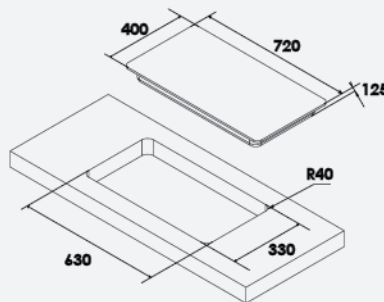

PGH-622S

- Heat Output (kW) : Total 8 kW
(Left : 4.0 kW , Right: 4.0 kW)
- 100 mm Cast Iron Burners
- Stainless Steel Top Panel
- 2 x Triple Ring Brass Burner Cap
- Automatic Ignition • L.P.G
- Burner Type: Cast Iron Burners + Enamel Pan Support
- Dimensions :
720(L) x 400(W) x 125(H) (mm)

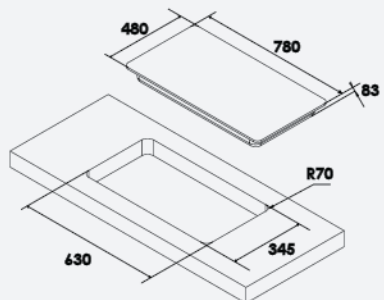

PGH-422N


- Rated Heat Input : 7.2 kW
- 2 Burners with Tempered Glass Top
- Automatic Ignition
- Durable Trivet
- Dimensions :
780(L) x 480(W) x 83(H) (mm)



Effortless Air, Elegant *Design*



**Airflue
Fan Cover**
Increases
airflow by 35%.



Adjustable Airflow
3 fan speeds,
auto horizontal and
manual vertical swing



**Stylish Elegance
& Function**
Muji-inspired
minimalist design



Efficiently Quiet
Copper motor for
powerful, gentle breeze



► TABLE FAN



AF-30B

- 35 W • 12" (300 mm)
- 220-240 V~ 50 Hz
- 3 Speeds
- Number of Blades : 3
- Air Delivery : 40 m³/ min
- Motor with Safety Fuse



PF-31A

- 35 W • 12" (300 mm)
- 220-240 V~ 50 Hz
- 3 Speeds
- Number of Blades : 3
- Air Delivery : 40 m³/ min
- Motor with Safety Fuse



PF-4105

- 40 W • 16" (400 mm)
- 220-240 V~ 50 Hz
- 3 Speeds
- Number of Blades : 5
- Air Delivery : 75 m³/min
- Motor with Safety Fuse



PF-4104

- 57 W • 16" (400 mm)
- 220-240 V~ 50/60 Hz
- 3 Speeds
- Number of Blades : 5
- Air Delivery : 53 m³/min
- Copper Motor with Safety Fuse
- Muji-inspired Minimalist Design



PF-1801

- 65 W • 18" (450 mm)
- 220-240 V~ 50 Hz
- 3 Speeds
- Number of Blades : 5
- Air Delivery : 75 m³/min
- Motor with Safety Fuse

► STAND FAN



PSF-4506X

- 40 W • 16" (400 mm)
- 220-240 V~ 50/60 Hz
- 3 Speeds
- Number of Blades : 3
- Air Delivery : 70 m³/min
- Rotary Switch
- Adjustable Height
- Motor with Safety Fuse



PSF-4512

- 40 W • 16" (400 mm)
- 220-240 V~ 50 Hz
- 3 Speeds
- Number of Blades : 5
- Air Delivery : 70 m³/min
- User Friendly Switch
- Square Base With L Lock
- CCAW Motor with Safety Fuse



PSF-4512(BK)

- 40 W • 16" (400 mm)
- 220-240 V~ 50 Hz
- 3 Speeds
- Number of Blades : 5
- Air Delivery : 70 m³/min
- User Friendly Switch
- Square Base With L Lock
- CCAW Motor with Safety Fuse



WiFi Powered Smart *Cooling*

Wall Fan 16" With WiFi PWF-4802R



Tailored Air Flow
Timer max 7.5 hours,
3 sleep modes, 3 fan
speeds, auto horizontal
and manual vertical swing



Dynamic Power Design
Robust copper motor
and 35% more airflow
'Airflue' design

Fan - tastic, Fabulous Breeze



With Remote Control

Stand Fan 16"
PSF-4509R



Personalised Coolness
3 fan speeds, auto horizontal and manual vertical swing



Copper motor
for durability and efficiency.



Perfect Remote Cooling
1-8 hours timer, sleep mode and remote control



► HOME COMFORT

► STAND FAN



PSF-4507

- 40 W • 16" (400 mm)
- 220-240 V~ 50 Hz
- 3 Speeds
- Number of Blades : 3 blades 135g
- Air Delivery 70 m³/min
- Motor with Safety Fuse



PSF-4508

- 40 W • 16" (400 mm)
- 220-240 V~ 50 Hz
- 3 Speeds
- Number of Blades : 3
- Air Delivery : 70 m³/min
- Rotary Switch
- Motor with Safety Fuse



PSF-4509R

- 57 W • 16" (400 mm)
- 220-240 V~ 50/60 Hz
- 3 Speeds
- Number of Blades : 5
- Air Delivery : 51 m³/min
- Auto Horizontal Swing
- AS Transparent Fan Blade
- Manual Vertical Swing
- Remote Control With WiFi



PSF-1801

- 65 W • 18" (46 cm)
- 220-240 V~ 50 Hz
- 3 Speeds
- Number of Blades : 5
- Air Delivery : 75 m³/min
- Motor with Safety Fuse

► WALL FAN



PWF-48

- 50 W • 16" (400 mm)
- 220-240 V~ 50 Hz
- 3 Speeds
- Number of Blades : 3
- Air Delivery : 80 m³/min
- Motor with Safety Fuse



PWF-4802R

- 57 W • 16" (400 mm)
- 220-240 V~ 50/60 Hz
- 3 Speeds
- Number of Blades : 5
- Air Delivery : 54 m³/min
- Auto Horizontal Swing
- Manual Vertical Swing
- AS Transparent Fan Blade
- Copper Motor



PWF-4801R


- 50 W • 16" (400 mm)
- 220-240 V~ 50 Hz
- 3 Speeds
- Number of Blades : 3
- Air Delivery : 80 m³/min
- With Remote Control
- Random / Sleep Mode / Timer / Rhythm / Speed
- Motor with Safety Fuse



PWF-4901

- 50 W • 16" (400 mm)
- 220-240 V~ 50/60 Hz
- 3 Speeds
- Number of Blades : 5
- Air Delivery : 88 m³/min
- Auto Horizontal Swing
- Manual Vertical Swing
- AS Transparent Fan Blade
- Copper Motor

NATURE'S SWEET Breeze



Silent
Operation



Powerful
DC Motor



5 Stars
Energy Rating

56" CEILING FAN
PCF-5601R(MB)



Aerodynamic
Blade Design



PCF-5601R(MB)

- 50 W • 56" (1420 mm)
- 220-240 V~ 50/60 Hz
- Number of Blades : 5
- Air Delivery : 210 m³/min
- Brushless DC Motor
- 6 Speeds Forward + 6 Speeds Reverse
- Safety Wire for Maximum Safety Protection
- Motor with Safety Thermal Fuse Protection



PCF-5601R(MW)

- 50 W • 56" (1420 mm)
- 220-240 V~ 50/60 Hz
- Number of Blades : 5
- Air Delivery : 210 m³/min
- Brushless DC Motor
- 6 Speeds Forward + 6 Speeds Reverse
- Safety Wire for Maximum Safety Protection
- Motor with Safety Thermal Fuse Protection



PCF-W5601R(DW)

- 50 W • 56" (1420 mm)
- 220-240 V~ 50/60 Hz
- Number of Blades : 5
- Air Delivery : 210 m³/min
- Brushless DC Motor • WiFi Connection
- 6 Speeds Forward + 6 Speeds Reverse
- Safety Wire for Maximum Safety Protection
- Motor with Safety Thermal Fuse Protection



PCF-W5601R(OAK)

- 50 W • 56" (1420 mm)
- 220-240 V~ 50/60 Hz
- Number of Blades : 5
- Air Delivery : 210 m³/min
- Brushless DC Motor • WiFi Connection
- 6 Speeds Forward + 6 Speeds Reverse
- Safety Wire for Maximum Safety Protection
- Motor with Safety Thermal Fuse Protection

► HOME COMFORT

► CEILING FAN



PCF-6002A(WH)

- 70 W • 60" (1500 mm)
- 220-240 V~ 50 Hz
- Number of Blades : 3
- Air Delivery : 250 m³/min
- AC Motor
- 5 Speeds and Regulator Control
- Safety Wire for Maximum Safety Protection
- Motor with Safety Thermal Fuse Protection



PCF-6003A(BK)

- 70 W • 60" (1500 mm)
- 220-240 V~ 50 Hz
- Number of Blades : 3
- Air Delivery : 250 m³/min
- AC Motor
- 5 Speeds and Regulator Control
- Safety Wire for Maximum Safety Protection
- Motor with Safety Thermal Fuse Protection



PCF-5602R(MB)

- 38 W • 56" (1420 mm)
- 220-240 V~ 50 Hz
- Number of Blades : 5
- Air Delivery : 227 m³/min
- DC Motor
- 7 Speeds and Reverse Function
- Safety Wire for Maximum Safety Protection
- Motor with Safety Thermal Fuse Protection



PCF-5603(MB)

- 90 W • 56" (1420 mm)
- 220-240 V~ 50 Hz
- Number of Blades : 5 Durable Steel Blades
- Air Delivery : 259 m³/min
- AC Motor
- 5 Speeds and Regulator Control
- Safety Wire for Maximum Safety Protection
- Motor with Safety Thermal Fuse Protection

► CIRCULATION FAN



PF-50903

- 45 W • 9"
- 220-240 V~ 50/60 Hz
- Number of Blades : 3
- Air Delivery : 5.5 m³/min
- 3 Speeds with Fixed Angle / Auto Oscillation
- Mechanical 90° Vertical Oscillation
- Auto 90° Horizontal Oscillation
- Durable Aluminium AC Motor

► INDUSTRIAL FAN



PFF-1800

- 115 W • 18"
- 220-240 V~ 50/60 Hz
- Number of Blades : 3
- Air Delivery : 110 m³/min
- 4 Speeds Rotary Control
- 3 Metal Blades for Maximum Air Flow
- With Swing Function
- Motor with Built-in Thermal Protection

► AIR COOLER



PAC-104M

- 65 W • 3 Fan Speeds (1 / 2 / 3)
- 220-240 V~ 50/60 Hz
- With Honeycomb Filter, Dust-proof Filter & 7 L Water Tank
- Horizontal Auto-swing & Manually Adjustable Vertical Air Flow
- Excellent Cyclic Sprinkling Water Pump System for Optimum Humidity, Cool & Fresh Air
- 2 Ice-packs for Cooler Effect



PAC-105M

- 65 W • 3 Fan Speeds (1 / 2 / 3)
- 220-240 V~ 50/60 Hz
- With Honeycomb Filter, Dust-proof Filter & 7 L Water Tank
- Horizontal Auto-swing & Manually Adjustable Vertical Air Flow
- Excellent Cyclic Sprinkling Water Pump System for Optimum Humidity, Cool & Fresh Air
- 2 Ice-packs for Cooler Effect



**TOWER FAN
PTW-181**

- 50 W
- 220-240 V~ 50/60 Hz
- Height 36"
- 3 Speeds
- Oscillating Head

The All-in-One Super Performer



Smart Portable Air Conditioner | PPA-1511W

PPA-1511W

- 1370 W
- 220-240 V~ 50/60 Hz
- Capacity : 12000 BTU (1.5 HP)
- 3 Wind Speeds (Low/Mid/High)
- WiFi Function with Bluetooth
- Auto Swing Function
- Air Circulation 360 m³/h
- Application Area 25~30 m²
- Temp Range 16°C - 30°C



PPA-1011W

- 1100 W
- 220-240 V~ 50 Hz
- Capacity : 9000 BTU (1 HP)
- WiFi Function
- Cool / Fan / Dry / Sleep Function
- Two Wind Speeds • Air Circulation 350 m³/h
- Application Area 14~20 m² • Temp Range 16°C - 30°C



Smart Portable Air Conditioner | PPA-1011W





Portable Air Conditioner Specifications

MODEL			PPA-1011W	PPA-1511W
Cooling Capacity		Btu / h	9000	12000
Power Sources		V / Hz	220-240 / 50	
Cooling	Rated Input Power	W	1100	1370
	Rated Input Current	A	5.0	6.0
Air Flow Volume		m ³ / h	350	360
Dehumidifying Volume		l / h	0.9	1.2
Energy Efficiency Ratio (EER)		W / W	2.5	2.4
Motor Output		W	65	90
Fan Type		-	Centrifugal	
Evaporator		-	Aluminium Fin-Copper Tube	
Climate Type		-	T1	T1
Isolation		-	I	I
Sound Pressure Level		dB(A) / H / M / L	55/--/50	56/54/52
Unit Dimensions		WxHxD (mm)	325 x 295 x 702	443 x 830 x 340
Package Dimensions		WxHxD (mm)	381 x 356 x 885	480 x 880 x 435
Net Weight		kg	24.4	28
Gross Weight		kg	28.4	33
Compressor		Type	Rotary	
Refrigerant Charge		kg	R410A / 410g	R410A / 565g
Dehumidifier			√	√
Timer			√	√
Vertical Auto Swing			-	-
Air Flow			√	√
Memory Function			√	√
Dry Anti-mildew Design			-	-
Auto Fan			-	-
Self Diagnosis			-	-
LED Display			√	√
WiFi Enabled			√	√
Remote Control			√	√
Warranty General			1 Year	1 Year
Warranty Compressor			5 Years	5 Years

Non-Inverters for Simple and Steady Cooling



PSW/PCU-1029 , PSW/PCU-1529 , PSW/PCU-2029

Model	Indoor Unit		PSW-1029	PSW-1529	PSW-2029
	Outdoor Unit		PCU-1029	PCU-1529	PCU-2029
Capacity	Rated	W	2600	3400	5100
	(Min-Max)	BTU/H	8871	11600	17401

Power Supply		220-240V~ 50Hz			
Running Current	A	3.6	4.9	6.8	
Power Consumption	W	760	1050	1580	

Indoor Unit

Air Flow Volume		m ³ /h	560	560	750
Sound Pressure Level	H	dB(A)	40	41	45
Dimensions	HxWxD	mm	777 x 250 x 201	777 x 250 x 201	910 x 294 x 206
Unit Weight		kg	7.5	8	10

Outdoor Unit

Refrigerant			R32		
Sound Pressure Levels	H	dB(A)	50	51	54
Dimensions	HxWxD	mm	722 x 276 x 459	787 x 290 x 498	863 x 349 x 602
Unit Weight		kg	22	25	34
Piping Connection	Liquid	mm	φ6		
	Gas		φ9.52	φ12	
Max. Refrigerant Pipe Length		m	15		20
Max. Refrigerant In Level			10		

CSPF	Wh/Wh	3.65	3.45	3.45
Star Rating		3 Stars		

Warranty	General	1 Year		
	Compressor	5 Years		



Innovative Cooling with Inverter Technology

PSW/PCU-1030i , PSW/PCU-1530i

PSW/PCU-2030i , PSW/PCU-2530i



Model	Indoor Unit		PSW-1030i	PSW-1530i	PSW-2030i	PSW-2530i
	Outdoor Unit		PCU-1030i	PCU-1530i	PCU-2030i	PCU-2530i
Capacity	Rated	W	2630	3400	5050	6500
	(Min-Max)	BTU/H	8974	11600	17230	22178

Power Supply		220-240V~ 50Hz			
Running Current	A	4	6.5	8.7	12
Power Consumption	W	900	1400	1850	2350

Indoor Unit

Air Flow Volume		m ³ /h	560	600	810	1000
Sound Pressure Level	H	dB(A)	39	40	45	51
Dimensions	HxWxD	mm	777 x 250 x 201	777 x 250 x 201	910 x 294 x 206	1010 x 315 x 220
Unit Weight		kg	7.5	7.5	9.5	11.5

Outdoor Unit

Refrigerant			R32			
Sound Pressure Levels	H	dB(A)	52	54	55	56
Dimensions	HxWxD	mm	722 x 276 x 459	722 x 276 x 459	795 x 305 x 550	853 x 349 x 602
Unit Weight		kg	18.5	19	23	29
Piping Connection	Liquid	mm	φ6			
	Gas		φ9.52		φ12	
Max. Refrigerant Pipe Length		m	15		20	
Max. Refrigerant In Level			10			

CSPF	Wh/Wh	4.63	4.61	4.63	4.81
Star Rating	4 Stars				

Warranty	General	1 Year			
	Compressor	5 Years			

► HOME COMFORT

PWH-988SP

- 3800 W • 240 V~ 50-60 Hz
- With DC pump
- High Quality UK Technology Heating Element
- 3-in-1 Compact Stop, Flow and Filter Valve
- Suitable For High And Low Water Pressure
- Splash Proof Protection IP25
- Electronic Variable Power Temperature Control

10 YEARS
ANTI LEAK TANK
WARRANTY

5 YEARS
HEATING ELEMENT
WARRANTY

5 YEARS
DC PUMP
WARRANTY



Multi Spray Hand Shower



2.5 MILLION
PRODUCT LIABILITY

► WATER HEATER



PWH-988E(BK)

- 3800 W • 240 V~ 50/60 Hz
- High Quality UK Technology Heating Element
- 3-in-1 Compact Stop, Flow and Filter Valve
- Suitable For High And Low Water Pressure
- Splash Proof Protection IP25
- Electronic Variable Power Temperature Control



PWH-M981E

- 3600 W
- 240 V~ 50/60 Hz
- Mesh Filter
- High Quality UK Technology Heating Element
- 3-in-1 Compact Stop, Flow and Filter Valve
- Suitable For High And Low Water Pressure
- Splash Proof Protection IP25
- Electronic Variable Power Temperature Control



PWH-988SPR

- 3800 W • 240 V~ 50/60 Hz
- With DC pump
- High Quality UK Technology Heating Element
- 3-in-1 Compact Stop, Flow and Filter Valve
- Suitable For High And Low Water Pressure
- Splash Proof Protection IP25
- Electronic Variable Power Temperature Control



► HAIR DRYER



PHD-2004FD

- 1700 - 2000 W
- 220-240 V~ 50/60 Hz
- 2 Speeds / 2 Heat Settings
- DC Motor
- Cool Shot Function
- Hang Up Hook For Convenience & Storage
- Detachable Concentrator
- Foldable Handle
- Overheating Protection



PHD-1300FD

- 1100 - 1300 W
- 220-240 V~ 50/60 Hz
- 2 Speed / 2 Heat Settings
- DC Motor
- Cool Shot Function
- Hang Up Hook For Convenience & Storage
- Detachable Concentrator
- Foldable Handle
- Overheating Protection



PHD-1802FI

- 1800 W
- 220-240 V~ 50 Hz
- Ionic Function for Smooth and Shining Hair
- 3 Heat Settings: Cool, Warm & Hot
- Balanced Heating Technology Distributes Smooth And Gentle Heat
- Foldable Handle For Travel And Easy Storage
- Powerful Centrifugal Six-Leaf Low Noise Fan
- Built-in Overheating Double Protection Function
- Hang Up Hook For Convenience & Storage



PHD-1203F

- 1200 W
- 220-240 V~ 50/60 Hz
- 3 Heat Settings: Cool, Warm & Hot
- Detachable Concentrator
- Powerful Centrifugal Six-leaf With Low Noise Motor
- Hang Up Hook For Convenience & Storage
- Balanced Heating Technology Distributes Smooth And Gentle Heat
- Foldable Handle For Travel And Easy Storage

Eco-Smart Clothes Care

Fully Auto Washing Machine 11 KG

PWA-1101X

- 540 W
- 220-240 V~ 50/60 Hz
- Tempered Glass With Damper (Soft Close)
- One Touch Programme
- Fixed Frequency Motor
- Stainless Steel Inner Tub
- 8 Water Levels
- 6 Wash Programmes :
Cotton, Quick, Strong, Kid's Wear, Heavy Duty, Tub Clean
- Dimensions : 580(L) X 625(W) X 960(H) (mm)



2+3+5
YEARS YEARS YEARS
GENERAL WARRANTY PCB WARRANTY MOTOR WARRANTY

PENSONIC
Your Enjoyment



► WASHING MACHINE
PRODUCT SPECIFICATIONS



MODEL		PWA-8003	PWA-1003	PWA-1203
Capacity (kg)		8	10	12
Wash Power		495	525	540
Power Supply (V)		220 - 240	220 - 240	220 - 240
Frequency (Hz)		50	50	50
No Of Programmes		8	8	6
Dimensions : (WxDxH) (mm)		520 x 558 x 900	550 x 588 x 920	580 x 625 x 960
Warranty	General	2 Years	2 Years	2 Years
	PCB	3 Years	3 Years	3 Years
	Motor	5 Years	5 Years	5 Years



MODEL		PWA-1101X	PWA-7018	PWA-7518
Capacity (kg)		11	7	7.5
Wash Power		540	320	380
Power Supply (V)		220 - 240	220 - 240	220 - 240
Frequency (Hz)		50-60	50 - 60	50 - 60
No Of Programmes		6	10	10
Dimensions : (WxDxH) (mm)		580 x 625 x 960	545 x 555 x 895	545 x 555 x 895
Warranty	General	2 Years	2 Years	2 Years
	PCB	3 Years	3 Years	3 Years
	Motor	5 Years	5 Years	5 Years

► LAUNDRY HELPMATE

► SEMI AUTO WASHING MACHINE PRODUCT SPECIFICATIONS



EXTRA CARE, LONGER CLOTHES LIFE

Embossed Diamond Drum Reduces Harmful Effects of Washing and Lengthens The Life Span of Clothes.



RUST FREE, ANTI-PET DESIGN

Plastic, Metal Free Body and Anti-Pet Design Helps to Maintain Body of Washing Machine In Excellent Condition, Thus Ensuring Longer Life.



BETTER LOAD CONTROL

Add Clothes At Any Time During The Wash Cycle. If You Want To, You Can Use The Wash and Spin Cycle At The Same Time.



THE GREENER CHOICE

Continuous Water Supply Is Not Required In A Semi-Automatic Machine, Making This Product A Greener Choice As Less Water Is Used.

MODEL		PWS-1005G	PWS-1205G
Wash Capacity (kg)		10	12
Spin Capacity (kg)		5	6
Wash Power (W)		410	450
Spin Power (W)		200	200
Power Supply (V)		220 - 240	220 - 240
Frequency (Hz)		50 - 60	50
Dimensions : (WxDxH) (mm)		866 x 494 x 946	875 x 505 x 1010
Warranty	General	1 Year	1 Year
	Motor	5 Years	5 Years



► SEMI AUTO WASHING MACHINE
PRODUCT SPECIFICATIONS



MODEL		PWS-6005X	PWS-7007	PWS-1006	PWS-1206
Wash Capacity (kg)		6	7	10	12
Spin Capacity (kg)		4.5	3.5	6.5	6.5
Wash Power (W)		350	300	380	420
Spin Power (W)		160	135	180	180
Power Supply (V)		220 - 240	220 - 240	220 - 240	220 - 240
Frequency (Hz)		50 - 60	50 - 60	50 - 60	50 - 60
Dimensions : (WxDxH) (mm)		723 x 406 x 819	730 x 420 x 860	807 x 482 x 980	876 x 515 x 994
Warranty	General	1 Year	1 Year	1 Year	1 Year
	Motor	5 Years	5 Years	5 Years	5 Years



MODEL		PWS-9005	PWS-1105	PWS-1305
Wash Capacity (kg)		9.0	11	13
Spin Capacity (kg)		6.0	6.0	7.0
Wash Power (W)		400	460	500
Spin Power (W)		160	160	230
Power Supply (V)		220 - 240	220 - 240	220 - 240
Frequency (Hz)		50	50	50
Dimensions : (WxDxH) (mm)		800 x 465 x 945	870 x 500 x 1010	930 x 540 x 1010
Warranty	General	1 Year	1 Year	1 Year
	Motor	5 Years	5 Years	5 Years

Dry Clothes, Any Weather

Dryer PD-8000V

- 8 kg • 2000 W • 220-240 V~ 50 Hz
- User Friendly Manual Knob Control • Jug Cover With Stirrer
- Galvanised Sheet Steel Drum Material • Drum Diameter 575 mm
- PCM Cabinet Material • Dimensions : 595(L) x 555(W) x 840(H) (mm)
- Time Setting (Max : 180 mins – Min : 20 mins)
- Deluxe Double Layer Anti Scald Door



Customisable Timer

Adjustable drying
time from 20 to 180
minutes and
stop-open door
for safety



**Wide
480 mm Door**
Easy loading
and unloading
for bulky items



**Vented
Drying**
Expels damp
air for
faster drying

► DRY IRON



PI-500

- 1200 W • 1.8 kg
- 240 V~ 50 Hz
- Adjustable Temperature Control Knob for All Types of Textiles
- Indicator Light



PI-600

- 1200 W • 1.8 kg
- 240 V~ 50 Hz
- Adjustable Temperature Control Knob for All Types of Textiles
- Non-stick Teflon Coating
- Indicator Light



PI-8502

- 1200 -1430 W
- 220-240 V~ 50/60 Hz
- Adjustable Temperature Control Knob
- Non-stick Coating Soleplate
- Variable Temperature Control
- Indicator Light

► STEAM / SPRAY IRON



PSI-1005

- 1890 -2250 W
- 220-240 V~ 50/60 Hz
- Capacity : 280 ml
- Variable Steam Control
- Self-Clean Function
- Adjustable Temperature Control Knob for All Types of Textiles
- 3-in-1 Function: Steam, Spray & Dry
- Non-stick Teflon Coating Soleplate
- Translucent Water Level Indicator
- Indicator Light



**Non-stick
Soleplate**



**Spray
Function**



**Steam/
Spray & Dry
Function**



PSI-1006

- 1800 -2200 W
- 220-240 V~ 50/60 Hz
- Variable Steam Control
- Self-Clean Function • Indicator Light
- Adjustable Temperature Control Knob for All Types of Textiles
- 3-in-1 Function: Steam, Spray & Dry
- Non-stick Teflon Coating Soleplate
- Translucent Water Level Indicator
- Variable Steam Control



**Spray
Function**



**Steam/
Spray & Dry
Function**



**Variable
Steam
Control**



PSI-8902

- 1200 - 1430 W
- 220-240 V~ 50/60 Hz
- Spray Function
- Indicator Light
- Adjustable Temperature Control Knob
- Non-stick Coating Soleplate
- Variable Temperature Control



**Non-stick
Soleplate**



**Spray
Function**



**Variable
Temperature
Control**

CREASE-FREE PRESS EVERY TIME!

Dry Iron PI-6001



**Glide Like
a Pro**
Ceramic-coated
non-stick
soleplate
for seamless
ironing



6 Settings
Customise heat
for any
fabric type



2 kg
**Tough on
Wrinkles**
2 kg power
zaps out
creases in a
flash!



► DRY IRON



PI-5001

- 1000 - 1200 W • 2 kg
- 220-240 V~ 50-60 Hz
- Non-stick Ceramic Soleplate
- Pilot Lamp Indicator
- 6 Fabric Settings
- Knob Temperature Selector



PI-6002

- 1000 - 1200 W • 1.8 kg
- 220-240 V~ 50-60 Hz
- Non-stick Ceramic Soleplate
- Pilot Lamp Indicator
- 6 Fabric Settings
- Knob Temperature Selector



PI-6001

- 1000 - 1200 W • 2 kg
- 220-240 V~ 50-60 Hz
- Non-stick Ceramic Soleplate
- Pilot Lamp Indicator
- 6 Fabric Settings
- Knob Temperature Selector



PI-6003

- 1000 - 1200 W • 1.8 kg
- 220-240 V~ 50-60 Hz
- Non-stick Ceramic Soleplate
- Pilot Lamp Indicator
- 6 Fabric Settings
- Knob Temperature Selector

Sparkling Clean, Zero *Excuses*

Wired Stick Vacuum Cleaner **PVC-1005H**

- 600 W
- 220-240 V~ 50-60 Hz
- Capacity : 800 ml Dust Cup
- Overheating Protection
- Cyclonic System With Washable Hepa Filter
- Dust Release Button
- 3 Layers Filtration
(Hepa Filter + Cyclonic Filter + Sponge Filter)



► VACUUM CLEANER

PVC-101

- 1000 W • 10 L
- 220-240 V~ 50-60 Hz
- Strong Blowing Function
- Washable Filter
- Dry / Wet / Blow Vacuum Cleaner
- Durable Plastic Blow Tank
- Powerful Suction for Waste Water



PVC-211

- 1200 W • 32 L
- 240 V~ 50 Hz
- Strong Blowing Function
- Washable Filter
- Dry / Wet / Blow Vacuum Cleaner
- Durable Plastic Blow Tank
- Powerful Suction for Waste Water



PVC-1000H

- 550 W
- 220-240 V~ 50/60 Hz
- Dust Capacity : 500 ml
- Suction Power 15 kPa
- Aluminium Telescopic Tube
- Plastic-plated Floor Brush
- Accessories: Telescopic Tube, Floor Brush, Dusting Brush, Crevice Tool, Wall Mount



► ACCESSORIES

► LPG REGULATOR



PLPG-1000(A)

- Zinc Base & Aluminium cover with POM control lever
- Max Inlet Pressure 6 Bar
- Outlet Pressure of 28 mbar for LPG Use
- Flow Rate of 1.0 kg/h
- 20 mm Inlet Size, 10 mm Outlet Nozzle



PLPG-1001H(A)

- Zinc Base & Aluminium Cover With POM Control Lever
- Max Inlet Pressure 6 Bar
- Outlet Pressure of 28 mbar for LPG Use
- Flow Rate of 1.0 kg/h
- 20 mm Inlet Size, 10 mm Outlet Nozzle



PLPG-2000

- Zinc Base & Aluminium Cover With POM Control Lever
- Max Inlet Pressure 6 Bar
- Outlet Pressure of 28 mbar for LPG Use
- Flow Rate of 2.0 kg/h
- 20 mm Inlet Size, 10 mm Outlet Nozzle



PLPG-2001H

- Zinc Base & Aluminium Cover With POM Control Lever
- Max Inlet Pressure 6 Bar
- Outlet Pressure of 28 mbar for LPG Use
- Flow Rate of 2.0 kg/h
- 20 mm Inlet Size, 10 mm Outlet Nozzle

► BLENDER ACCESSORIES



JC-3202

- 1 L
- Stainless Steel Blade



MS-3302

- Stainless Steel Blade Cutter
- Small Capacity Grinding



JC-3203

- 1 L
- Stainless Steel Blade



MS-3310

- Stainless Steel Blade Cutter
- Small Capacity Grinding

For Models : PB-3203, PB-3203L, PB-3205, PB-3205DJ, PB-3205L, PB-3206, PB-3301

► FAN BLADE



FB-12N

- 12"
- 3 Blades

For Models : PF-31A, AF-30B

FB-16N

- 16"
- 3 Blades

For Models :
PF-41A, PWF-48, PWF-4801R, PSF-4506X
PSF-4507, PSF-4508



FB-165A

- 16"
- 5 Blades

For Models :
PF-4105, PSF-4512, PSF-4512(BK)
PWF-4901

► PORTABLE GAS CARTRIDGE



PCG-1

- Capacity : 230 g
- Cylinder Gas for Portable Gas Cooker
- Lasts Up to 3 Hours

For Model : PPG-2004N

► WATER FILTER CARTRIDGE



**PMP-15
WATER FILTER**

- Filter Capacity : 48-71 L / Day
- Type of Purification : Ceramic Filtration
- Dims (mm) : 660(H) x 315(W) x 315(D)
- 💧 Cartridge : PMP-15R1 / PMP-15R2 / PMP-15R3



**PP-123
WATER FILTER**

- Water Purifier / Water Filter
- Double Filtration System
- CTO Carbon Block
- 100% Coconut Shell Activated Carbon
- Removes Chlorine, Organic Chemical, Unpleasant Odours and Colours
- Polypropylene Filter Provides Effective Filtration and Eliminates Certain Organic Toxins & Metals
- 💧 Cartridge : PP-123R1 / 123R2



**PP-123R1
CARBON BLOCK**

- 5.0 Micron Filtration for Reduction of Cryptosporidium and Giardia (VOCS)
- Excellent Drinking Water of Polishing Filter
- Class 1 Chlorine, Taste and Odour Reduction

For Model: PP-123

► ACCESSORIES

► WATER FILTER CARTRIDGE



PP-123R2 SEDIMENT FILTER

- Polypropylene Replacement Cartridge
- For Removal of Sand , Silt , Dirt and Rust
- Maximum Housing Temperature : 125°F (52°C)
- Water Flow : 20 L Per Minute
- 1 pack consists of 5 pcs

For Model: PP-123



PP-123R COMBO SEDIMENT FILTER

- 5.0 Micron Filtration for Reduction of Cryptosporidium & Giardia (VOCS)
- Polishing Filter for Excellent Drinking Water

For Model: PP-123



PMP-15R1 MINERAL STONES

- Enriches Essential Minerals, Oxygen in the Water
- Controls Water pH to Mild Alkaline
- Keeps Water Fresh and Activated

For Model: PMP-15



PMP-15R2 CERAMIC DOME

- Micron Size : 0.9 - 0.5 Micron
- Filtration that Block Sediment Particles such as Dirt and Rust and also Block Bacteria

For Model: PMP-15



PMP-15R3 4-STEP FILTRATION SYSTEM

- Step 1 : Activated Carbons Removes Chlorine, THMs Organic Chemicals and Unpleasant Odours and Colours
- Step 2 : Silica Sand Removes Acidic Components from the Water
- Step 3 : Zeolite Removes Heavy Metals
- Step 4 : Mineral Sand Releases Minerals and Adjusts pH of Water to Mild Alkaline

For Model: PMP-15

PENSONIC SALES & SERVICE CENTRES MALAYSIA

HEAD OFFICE

1165, Lorong Perindustrian Bukit Minyak 16,
Taman Perindustrian Bukit Minyak,
14100 Simpang Ampat, Penang, Malaysia.

SELANGOR

Lot 11A, Jalan 223 Sec 51A,
46100 Petaling Jaya, Selangor.
Tel : 603- 7954 5200

PENANG

143- 145, Perak Road,
10150 George Town, Penang.
Tel : 604- 226 9923 / 226 9050

PERAK

102A, Jalan Tasek Timur,
Taman Tasek Indah,
31400 Ipoh Perak.
(1st Floor of Double Storey Terrace Shop Lot.)

JOHOR

31, Jalan Ros Merah Satu/1,
Taman Johor Jaya,
81100 Johor Bahru, Johor.

LABUAN

SU11T/SL05, Wisma Wong
Wo Lo, 87000 Labuan.

PN 7884, Jalan OKK,
Awang Besar, W.P Labuan,
87000 Labuan.

KELANTAN

PT-621 Ground Floor,
Batu 2 Jalan Pengkalan Chepa,
15400 Kota Bharu, Kelantan.

SABAH

Lot No 24, Block C Ground Floor,
Millenium Commercial Centre,
Off Jalan Lintas Kepyayan,
88200 Kota Kinabalu, Sabah.
Tel : 6088 - 715 520
Service Hp : 6012 - 342 9108

SARAWAK

Ground Floor Intermediate Shop,
Sublot 8, Lot 2099,
Jalan Tun Ahmad Zaidi Adruce,
93150 Kuching, Sarawak.
Tel : 082 - 238 211

Please Call **1-800-881-770**
careline

For Prompt After-Sales Service (Malaysia Only)

* **Operation Hours:** Mon - Fri 8:30am - 5:30pm
Sat, Sun & Public Holiday Closed

PENSONIC SALES & SERVICE SDN. BHD. (198701003749/162419-M)

PENSONIC SALES & SERVICE CENTRES WORLDWIDE

CHINA

5F, Block 10, XiangZhou Technology
Industrial District Meihua Xi Road, No.
2372 XiangZhou Zhuhai City, 519000,
Guangdong, China
Tel: 0756- 852 5933

Room No. 802, 8th Floor of Rongshan
Postal Building, No.6 Rongqi Dadao,
Ronggui Street, Shunde, Foshan,
Guangdong Province, China
Tel: 852- 2290 2280

HONG KONG

No.2, 14th Floor, Keen Hung Commercial
Building, 80 Queen's Road East,
Wan Chai, Hong Kong
Tel. Fax: 852- 2727 0997 / 2758 5088

SINGAPORE

2 Leng Kee Road, #06-03 Thye Hong
Centre Singapore 159086
Tel. Fax: 65- 6472 6504 / 6475 9534

INDONESIA

Ruko Osaka, Komplek Asahikawa
OTPE No. 005 Jl. Pantai Indah Kapuk 2,
Salembaran Jati, Kec. Kosambi,
Kabupaten Tangerang, Banten,
DKI Jakarta 15213 Indonesia
Tel: 621- 3973 3599

BRUNEI

No D1, Spg 396, Jln Jerudong,
Bangunan Perkasa 1, Kampung
Sengkurong B, Bg 1321,
Brunei Darussalam
Tel. Fax: 673- 2611 918 / 2610 801

VIETNAM

No 59-61 Nguyen Thi Thap Street,
Him Lam Area, Tan Phong Ward,
District 7 Ho Chi Minh City, Vietnam
Tel. Fax: 848- 3945 3483 / 3945 3482

CAMBODIA

No.252-254, St.63 Corner St.400,
Sangkat Boeng Keng Kang I,
Khan Chamcarmon, Phnom Penh, Cambodia
Tel: 855- 23 221868

PHILIPPINES

165 Quirino Avenue Baesa, Quezon City
Manila Philippines 1115

#606 Evangelista St G Puyat St Quiapo Manila
Tel: 733-28-51 / 02- 7357691 / 02- 7332840

LEBANON

Verdun-Bekaa Str-Zahraa Bldg-3 Flr,
P.O.Box 155150 Beirut-Lebanon
Tel. Fax: 961- 1817 681 / 1318 152

EGYPT

Usama Shahin St of Saad Zaglol St.,
El Bar Elsharkey Shibin El Kom Menofia,
POB 32514, Egypt
Tel. Fax: 201- 0009 3033

SRI LANKA

No. 68, Keyzer Street
Colombo 11, Sri Lanka
Tel: 9411- 2343586
Fax: 9411- 2326699

FIJI

Centerpoint 1, Ratu Dovi Road,
GPO Box 14416 Suva Fiji
Tel. Fax: 679- 339 3111 / 334 0255

SEYCHELLES

P.O.Box 1371, Victoria, Mahe, Seychelles
Tel. Fax: 248- 323 680 / 324 724

TIMOR LESTE

Avenida De Presidente Nicolau Lobato,
Bidau, Lecidere, Nain Feto Dili, Timor Leste
Tel: 670- 3311278

MALDIVES

Ma.Elyzium - Buruzumagu
Male' 20240 Maldives
Tel: 960- 3009907

MAURITIUS

12, Corderie Street, Port Louis, Mauritius.
Tel: 230- 2121563

SOUTH KOREA

6F, Jung Am Building, Eun-cheon-ro 25,
Kwan-Ak-gu, Seoul, Korea
Tel: 070- 4185 3645
Fax: 0507- 0326 7040

MYANMAR

No-280, 9 Ward, Thumgalar Road,
South Okkalapa Township,
Yangon Region, Myanmar
Tel: 959- 406662246

THAILAND

32/20 Moo.3 Bang Khu Rat
Bang Bua Thong,
Nonthaburi 11110, Thailand
Tel: 6699 989 9252

NEPAL

Sadobato - 15
Lalitpur Nepal



PENSONIC
Your Enjoyment



GET CIRCLEZ APP NOW!

Now Available At



Online Warranty • Rewards • Estore • Product Status Updates